




Samsung WB1100F Camera Flash Replacement

Replace the camera flash of your Samsung WB1100F.

Written By: Jesse Lindsey

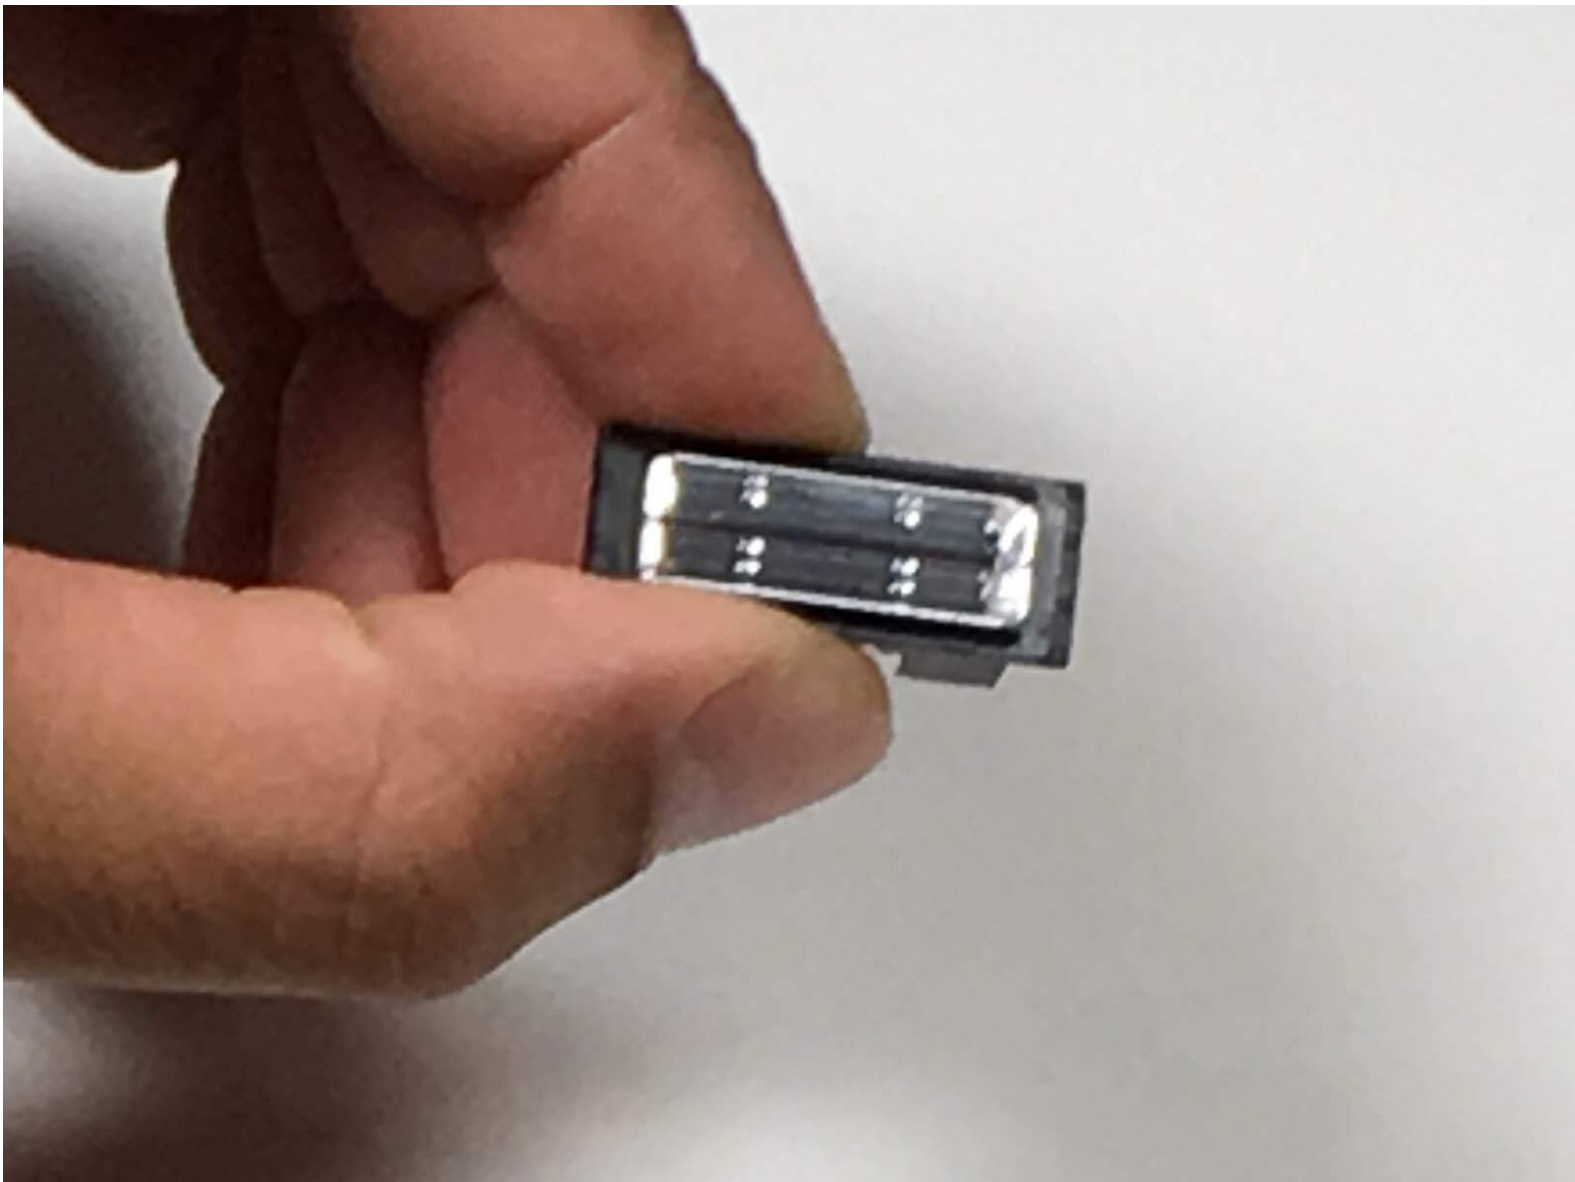

INTRODUCTION

This guide provides instructions on how to replace the flash component of the Samsung WB1100F.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Soldering Station](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — LCD Screen Cover




- Remove six 1.2 mm Phillips #00 screws connected to the tripod dock and adjacent screws.
- Remove six 1.2 mm Phillips #00 screws from the side of the camera.

Step 2



- ⓘ Use a plastic opening tool or spudger if available.
- Using the flat end of a spudger, loosen the connection between the back panel and the device. Remove the back panel using your hands.

Step 3 — Camera Flash

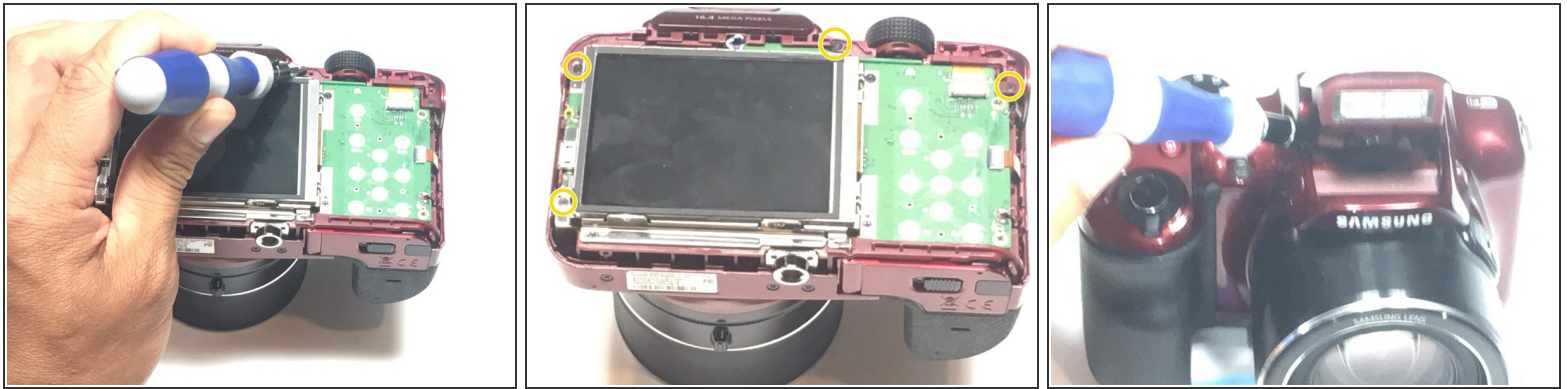


- Remove four 1.2 mm Phillips #00 screws from the top panel.

Step 4



- Using the flat end of a spudger, loosen the connection between the top panel and the device. Remove the top panel using your hands.

Step 5

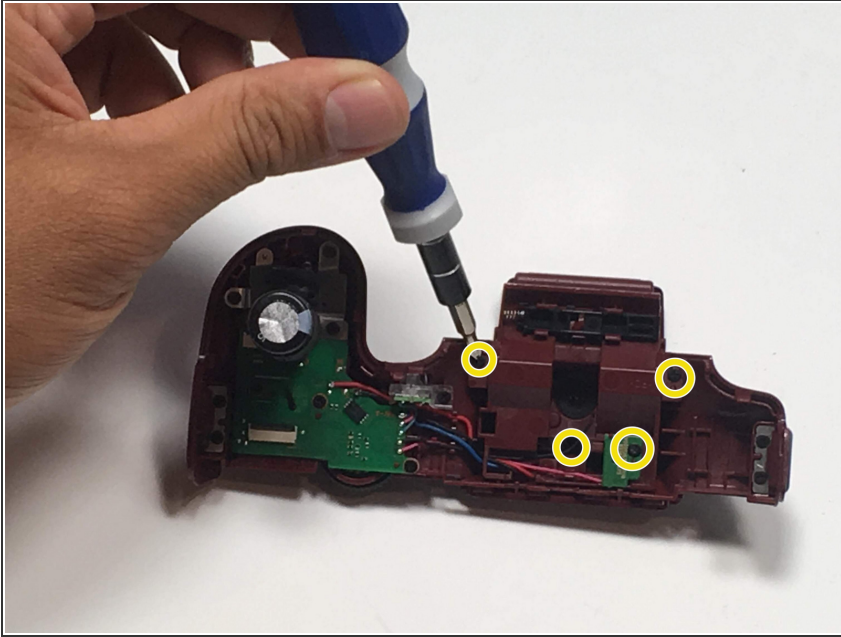



- Remove four 1.2 mm Phillips #00 screws from the flash assembly

Step 6



- Using your hands, remove the flash assembly. This should not require much force.

Step 7

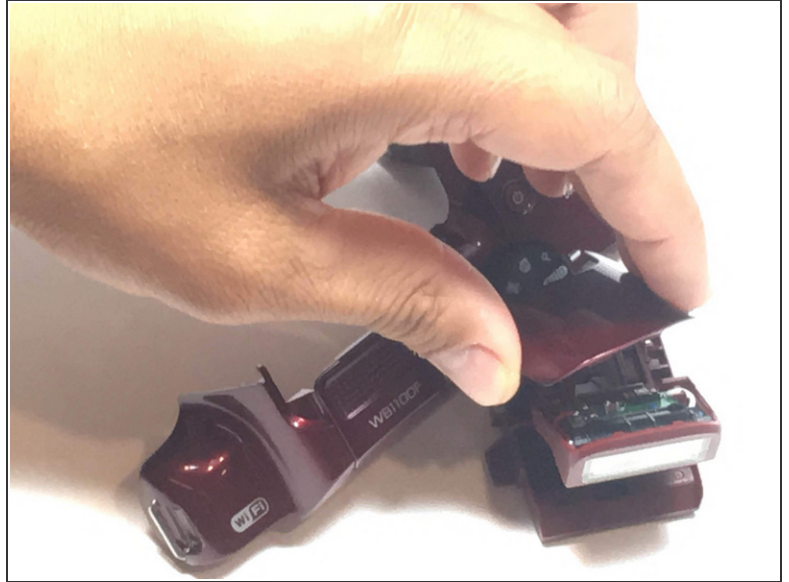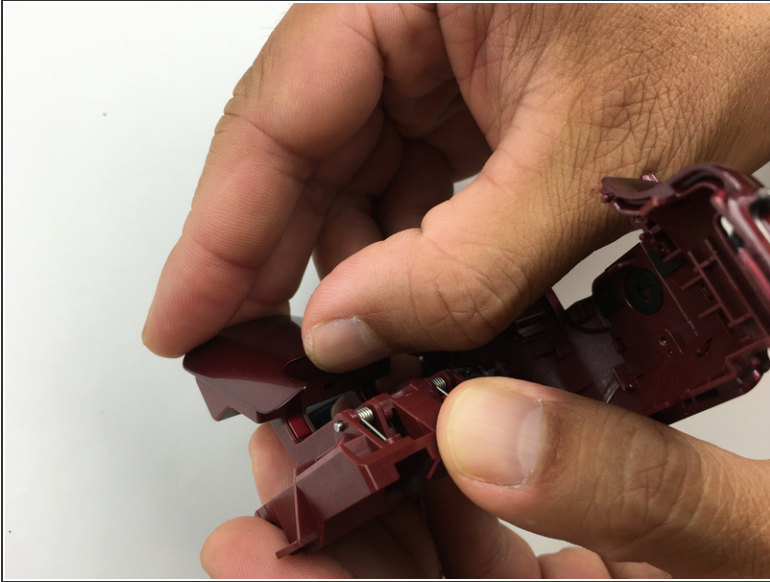


- Using your hands, remove the top flash panel by pressuring down on the back to release a locking tab.

Step 8



- [Desolder](#) three wires on the flash assembly.

Step 9

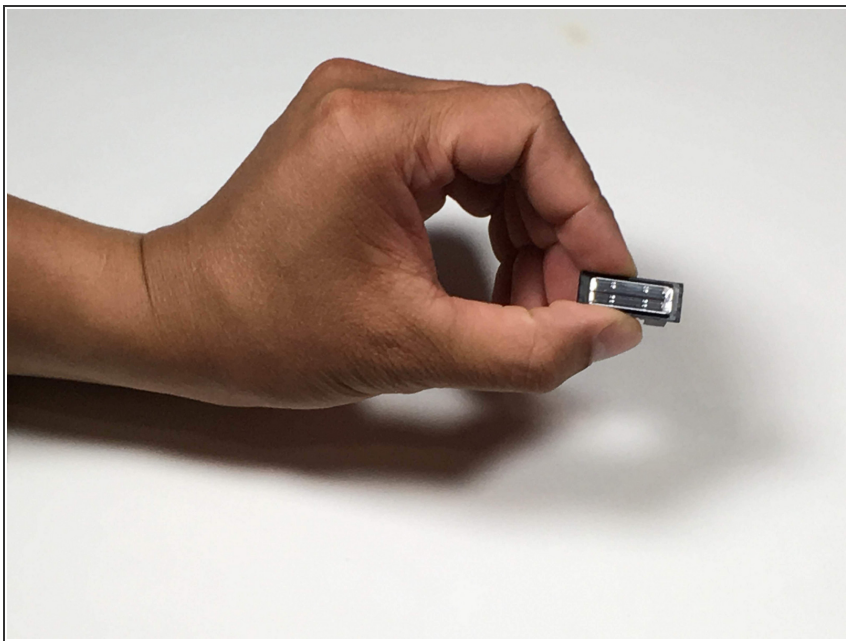

- Gently remove the flash assembly from the body.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 08:36:29 AM.